




WIDE VIEW FULL FREE 3-STAGE MAST

Mast model	Max.lifting height (mm)	Load capacity (load center 600mm)(kg)	Height (mast lowered)(mm)	Free lift (with backrest) (mm)	Service weight (kg)	Fork tilt angle α/β (°)
		CQD20-G825HD	CQD20-G825HD	CQD20-G825HD	CQD20-G825HD	
ZSM850	8500	2000	3634	2611	4845	2°/4°
ZSM900	9000	1900	3801	2778	4895	2°/4°
ZSM950	9500	1800	3967	2944	4945	2°/4°
ZSM1000	10000	1700	4134	3111	4995	2°/4°
ZSM1050	10500	1550	4301	3278	5045	2°/4°
ZSM1080	10800	1450	4401	3378	5075	2°/4°
ZSM1100	11000	1350	4467	3444	5100	2°/4°
ZSM1150	11500	1250	4634	3611	5150	2°/4°
ZSM1200	12000	1100	4801	3778	5200	2°/4°
ZSM1250	12500	900	4967	3944	5250	2°/4°

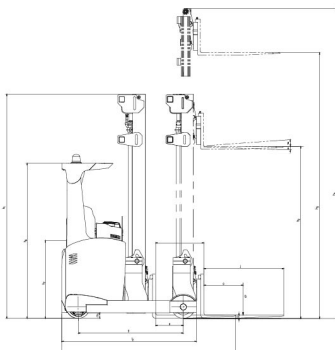

Aut-Right angle stacking aisle width
a:Clearance a=200mm



Note: The vertical axis stands for load capacity and the horizontal axis stands for load center which is calculated from the front surface of the forks to the gravity of the standard load. The standard load means a cubic with 1000mm edge length. When mast is tilted forward, using non-standard forks or loading large goods, the load capacity will be reduced. The load capacity of standard mast at different load center can be known from this load chart.



RENEWABLE ENERGY TECHNOLOGIES

With the use of the excellent load-sensing steering system and AC controlling renewable energy technologies, the forklift is more energy-saving and the working hour of the battery is extended by 15%.



Manufacturer's Data and Design Characteristics


Characteristics			
1.01	Manufacturer		HELI
1.02	Model		CQD20
1.03	Configuration number		G825HD
1.04	Rated capacity	Q	kg
1.05	Load center distance	C	mm
1.06	Power mode		Battery
1.07	Driving mode		Seated
1.08	Front overhang	X	mm
1.09	Wheelbase	Y	mm
Weight			
2.01	Total weight (with/without battery)		kg
2.02	Aisle load ,unladen,front/rear (fork advanced)		kg
2.03	Aisle load ,unladen,front/rear (fork retracted)		kg
2.04	Aisle load ,laden,front/rear (fork advanced)		kg
2.05	Aisle load ,laden,front/rear (fork retracted)		kg
Tyres			
3.01	Tyre type		Polyurethane
3.02	Tyre size,front		434x135
3.03	Tyre size,rear		433x135
3.04	Wheels,number front/rear (x=driven wheels)		1x/2
3.05	Tread, rear	b ₁₁	mm
Dimensions			
4.01	Fork tilt angle (forward/backward)	α/β	°
4.02	Height (mast lowered)	h ₁	mm
4.03	Free lifting height	h ₂	mm
4.04	Lifting height (standard)	h ₃	mm
4.05	Max. height,extended (with backrest)	h ₄	mm
4.06	Height of overhead guard	h ₅	mm
4.07	Seat height relating to SIP (to ground)	h ₇	mm
4.08	Overall length (with fork)	l ₁	mm
4.09	Overall length (without fork)	l ₂	mm
4.10	Overall width	d ₁	mm
4.11	Fork size,thickness x width x length	s/e/l	mm
4.12	Fork carriage,according to ISO2328		2A
4.13	Distance between fork-arms, Max./Min.	b ₅	mm
4.14	Fork shiftdistance		mm
4.15	Distance between support arms	b ₄	mm
4.16	Reach distance	l ₄	mm
4.17	Ground clearance (laden,between mast)	m ₁	mm
4.18	Right angle stacking aisle width for 90°/120°/150° counter	A ₁	mm
4.19	Right angle stacking aisle width for 90°/120°/150° counter	A ₂	mm
4.20	Min. outside turning radius	W ₄	mm
Performance Data			
5.01	Travel speed (laden/unladen)		km/h
5.02	Lift speed (laden/unladen)		m/s
5.03	Lowering speed (laden/unladen)		m/s
5.04	Reach speed (laden/unladen)		m/s
5.05	Max.gradeability (laden/unladen)		%
Battery			
6.01	Battery voltage/Capacity	V/Ah	48/775
6.02	Battery weight (Min./Max.)	kg	1235
6.03	Battery box dimension	mm	1220×427×784
Motor and controller			
7.01	Driving motor powering	kw	8
7.02	Lifting motor powering	kw	12.5
7.03	Steering motor powering	kw	0.4
7.04	Driving motor controlling mode		MOSFET/AC
7.05	Lifting motor controlling mode		MOSFET/AC
7.06	Steering motor controlling mode		MOSFET/AC
Addition data			
8.01	Transmission box		HELI special transmission box
8.02	Service brake/Parking brake		Electromagnetic

NOTE: *Detailed information about battery, please contact our salesman or engineer.

HELI

Reliable special designed instrument

The reliable special instrument gives a complete display of the vital information, like operation status, fault detection, etc. It ensures the operator predominate the vehicle status more intuitive and convenient.

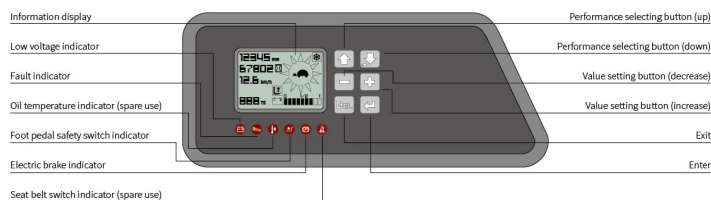

Standard configuration

Optional

AC travelling motor
AC lifting motor
AC steering motor
ZAPI travelling motor controller
ZAPI lifting motor controller
ZAPI steering motor controller
Electromagnetic brake
Lifting height pre-selector
Monitoring system
DC/DC converter
Low noisy gear pump
Control valve (four throw)
4600mm three stage full free lift mast
Integral shiftdifter
Standard fork
Backrest
Polyurethane tyre
LED meter
Front working light
Rearview mirror with wide view angle
Safety belt
Blue warning light

fork with other length
Fork extension
Reversing buzzer
Other battery
Germany hoppecker battery
Italy FAAM battery
Battery charger
Customer made color
Battery side pulling
HELI smart fleet management system

www.heliforklift.net

HELI

2.0 t
G2 SERIES
AC ELECTRIC REACH
TRUCK-SIT-DOWN TYPE
(HEAVY DUTY TYPE)



ANHUI HELI CO., LTD.

Add / No.668, FangXing Road, Hefei, China

Fax / +86-551-63639966

Tel / +86-551-63639068(America); 63639258(Europe); 63639358(Asia); 63662105(Africa & Middle East); 63639530(Overseas Marketing)



Linked in



Youtube



Facebook

Design & Print: Zhihui Printing 20230722

G2 SERIES 2.0t

Three phase AC type motor technology

- Three phase AC type motor control on travelling, lifting and steering
- Good acceleration
- Fast and sensitive respond on travel direction shifting Free from maintenance motor without carbon brush having long service life and low maintenance cost
- Energy regenerating during deceleration extending operation hours
- Max. travelling speed without load 20% increased
- Max. travelling speed with load 27% increased

Newly designed hydraulic system

- Newly designed hydraulic system with high working efficiency
- High power lifting motor
- MOSFET lifting speed governing electric controller
- New type low noisy gear pump
- Max. lifting speed without load 15% increased
- Max. lifting speed with load 25% increased

Optimized intelligent design


- ZAPI travelling motor controller
- ZAPI lifting motor controller
- ZAPI steering motor controller
- CAN bus technology
- Emergency power off of both main circuit and control circuit
- Parking brake on slope
- Operation sequence protection
- Travelling speed control
- Electric controller self protection

Advanced EPS electric powered steering

- EPS electric powered steering offering easy, flexible, high efficient and mute operation
- Steering motor controller
- Automatic centering function
- Real-time shifting between 180°steering mode and 360° steering mode
- Automatic limit on speed and accelerated speed when steering

Easy operated thumb switch

- To control hydraulic functions
- Clear operating units
- Proportional solenoid offering a stable and comfort lowering action



Overhead guard

- Fence on top of the overhead guard offering driver wide view
- Beveled view angle design with front ring beam meeting humanized requirements

Comfort cab

- Comfort cab offering driver good working environment and easy operation
- Easy reach to important operation
- Adjustable seat (seat position /backrest angle)

Wide view mast

- Good view when loaded
- Integral sideshifter
- Mast vertical, fork tilt
- High residual load capacity at high lift height
- Lift height range:4600-12500mm
- Buffering during lifting and lowering
- Buffering on lifting and lowering limit
- Buffering when cylinder moving forward

Displayer

- High quality meter displaying important operating data
- Display of traveling direction and drive wheel angle
- Display of 180°/360° steering mode
- Display of battery quantity and fault code
- Travelling mode selection
- Lifting lock indication
- Hour meter

HELI smart fleet management system (optional)

- Vehicle positioning
- Remote diagnosis
- Remote monitoring
- Maintenance reminder
- Battery management
- Statistical form
- Vehicle management
- Identification recognition (optional)
- Weight management (optional)
- Collision management (optional)

